


## DATA SHEET

# HYBRID ISOLATOR TAP PD

## DESCRIPTION

This high quality hybrid component includes in one product three different functions: Isolator, Tap and Photodiode. This allows to save space in design of amplifiers and components that need all these three functions.

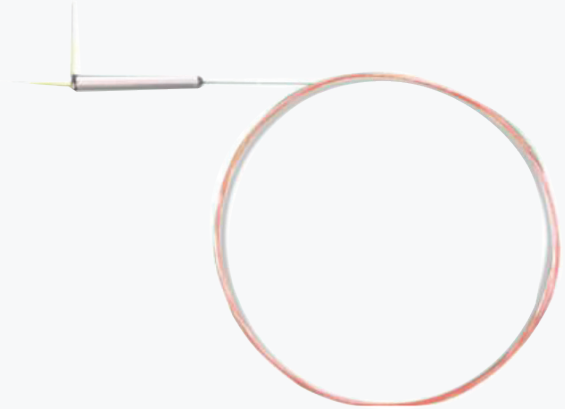

## KEY FEATURES

---

Highly integrated Isolator/TAP/PD

---

Super-compact size: Ø3.0x22

---

Customizable tap ratio, 1/2/5/X %

---

Provides high directivity for preventing backward optical power into PD

---

Low dark current

---

Operating temperature range: 0 °C to 70 °C

---

## CONTACT INFORMATION

**For additional information and evaluation samples order, please contact:**

**Chuck Sinha, Sr. Director of Sales**

Jabil Photonics

960 Inglewood Dr. Suite 100, Pleasanton, CA

Mobile: 408-505-0955 Email: [Chuck\\_Sinha@Jabil.com](mailto:Chuck_Sinha@Jabil.com)