

DATA SHEET

DUAL MINI EDFA MODULE

DESCRIPTION

The Dual Channel EDFA is a super compact gain module with two independent inputs and outputs. These EDFAs share a dual uncooled 980nm pump laser. Each EDFA has independent control loop. The laser control loop and are working under APC mode. Each EDFA's output can be adjusted from 0 to 6dBm in 0.5dB step via I2C interface.



KEY FEATURES

Low noise figure: typical figure is under 4.5dB

1528nm to 1569nm, dual single channel

Each channel output power up to 6dBm

Two EDFAs inside one compact box

Provide APC/ACC operation mode

Temperature range -5 °C To 60°C

Form factor 55x40x12.5mm

APPLICATIONS

Ultra small package with dual EDFA inside

DATA SHEET

DUAL MINI EDFA MODULE

ENVIRONMENTAL SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Unit
Operation Temperature	0	25	+75	°C
Storage Temperature	-40	-----	+85	°C
Operation Humidity*	5	-----	95	%
Storage Humidity	5	-----	95	%

(*) not condensing

OPERATING SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Unit
Supply Voltage	3.15	3.3	3.45	V
Power Dissipation		5		W


OPTICAL SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Unit
Wavelength	1528		1568.3	nm
Input Power	-16		-8	dBm
Output Power	0		8	dBm
Output Power Variation	-0.5		0.5	dB
Noise Figure			6	dB
Backward ASE power			-35	dB
Isolation @ Input/Output Port	35			dB
Return Loss	40			dB
PMD			0.3	ps
PDG			0.3	dB

DATA SHEET

DUAL MINI EDFA MODULE

DIMENSIONS

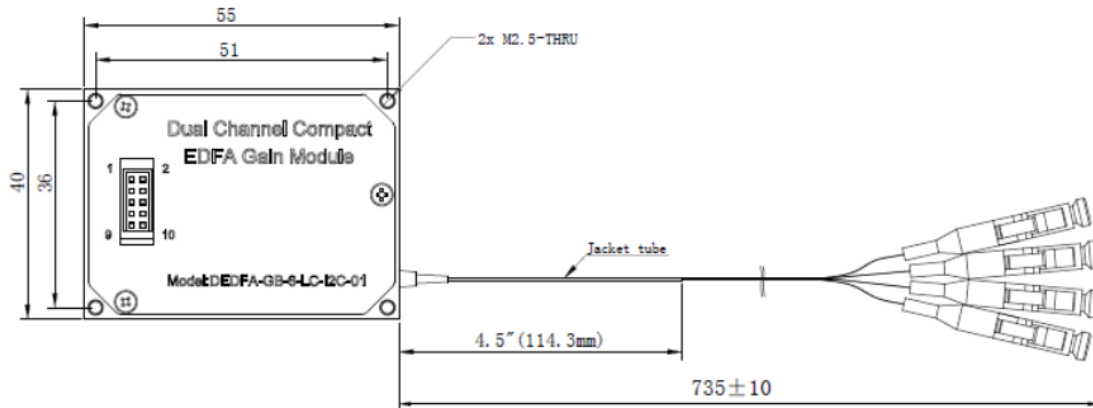

ORDERING INFORMATION

Jabil Part Number	Package	Gain	Output Power	Other Info
JP-EDFA-DUALMINI-2408	module	24 dB	8dBm	

CONTACT INFORMATION

For additional information and evaluation samples order, please contact:

Chuck Sinha, Sr. Director of Sales
 Jabil Photonics
 5960 Inglewood Dr. Suite 100, Pleasanton, CA

Mobile: 408-505-0955 Email: Chuck_Sinha@Jabil.com