

DATA SHEET

100G QSFP28 CWDM4 TRANSCEIVER

DESCRIPTION

The 100G QSFP28 CWDM4 transceiver is designed for use in 100 Gigabit Ethernet links over single mode fiber. The optical transmitter integrated with four lasers with center wavelengths of 1271 nm, 1291 nm, 1311 nm and 1331 nm. The optical signals are then multiplexed into a single-mode fiber through an industry standard LC connector. On the receiver side, four lanes of optical data streams are optically de-multiplexed by an integrated optical de-multiplexer and transformed to an electrical CAUI-4 compliant output driver.

A serial EEPROM in the transceiver allows the user to access transceiver monitoring and configuration data via the 2-wire QSFP Management Interface. This interface uses a single address, A0h, with a memory map divided into a lower and upper area. Basic digital diagnostic (DD) data is held in the lower area while specific data are held in a series of tables in the high memory area.



KEY FEATURES

Links up to 2km on SMF with FEC

Operating case temperature: 0~70°C

Power consumption: 3.5W

Integrated CWDM DFB TOSA
(1271,1291,1311,1331nm) and PIN ROSA

Supports 25.78125Gbps Data rate per wavelength

Build in CDR on both TX and RX

DDM function implemented

Hot pluggable QSFP28 form factor

Duplex LC receptacles

Single +3.3V power supply

APPLICATIONS

100G Ethernet

Proprietary High Speed Interconnections

Data Center Networking

COMPLIANCES

Compliant with CWDM4 MSA

Compliant with IEEE 802.3 CAUI-4

Compliant with SFF-8636/8661/ 8679

Compliant with RoHS-6

DATA SHEET

100G QSFP28 CWDM4 TRANSCEIVER

ENVIRONMENTAL SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Unit
Operation Temperature	0	+25	+70	°C
Storage Temperature	-40	-----	+85	°C
Operation Humidity*	10	-----	85	%
Storage Humidity	10	-----	85	%

(*) not condensing

OPERATING SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Unit
Supply Voltage	3.135	+3.3	+3.465	V
Power Dissipation (Each lane)			3.5	W
Total Data Rate		103.125		Gb/s
Data Rate (Each lane)		25.78125		Gb/s
Transmission Distance			2	Km

OPTICAL SPECIFICATIONS

TRANSMITTER

Parameter	Min.	Typ.	Max.	Unit
Bit Rate (each Lane)	25.78125 +/- 100ppm			Gb/s
Line Wavelength (CH0)	1264.5		1277.5	nm
Line Wavelength (CH1)	1284.5		1297.5	nm
Line Wavelength (CH2)	1304.5		1317.5	nm
Line Wavelength (CH3)	1324.5		1337.5	nm
Side Mode Suppression Ratio (SMSR)	30			dB
Average Launch Power (each lane)	-6.5		2.5	dBm
Transmitter OMA (each lane)	-4		2.5	dBm
Extinction Ratio (ER)	3.5			dB
Average launch power (OFF transmitter, each lane)			-30	dBm
Transmitter eye mask definition (X1, X2, X3, Y1, Y2, Y3)	(0.31, 0.4, 0.45, 0.34, 0.38, 0.4)			
Transmitter reflectance			-12	dB
Input differential impedance (each line)		100		Ω

RECEIVER


Parameter	Min.	Typ.	Max.	Unit
Bit Rate (each Lane)	25.78125 +/- 100ppm			Gb/s
Line Wavelength (CH0)	1264.5		1277.5	nm
Line Wavelength (CH1)	1284.5		1297.5	nm
Line Wavelength (CH2)	1304.5		1317.5	nm
Line Wavelength (CH3)	1324.5		1337.5	nm
Average RX Power (each lane)	-11.5		2.5	dBm
Receiver Sensitivity (unstressed, each lane)			-10	dBm

DATA SHEET

100G QSFP28 CWDM4 TRANSCEIVER

DIMENSIONS

Unit: mm

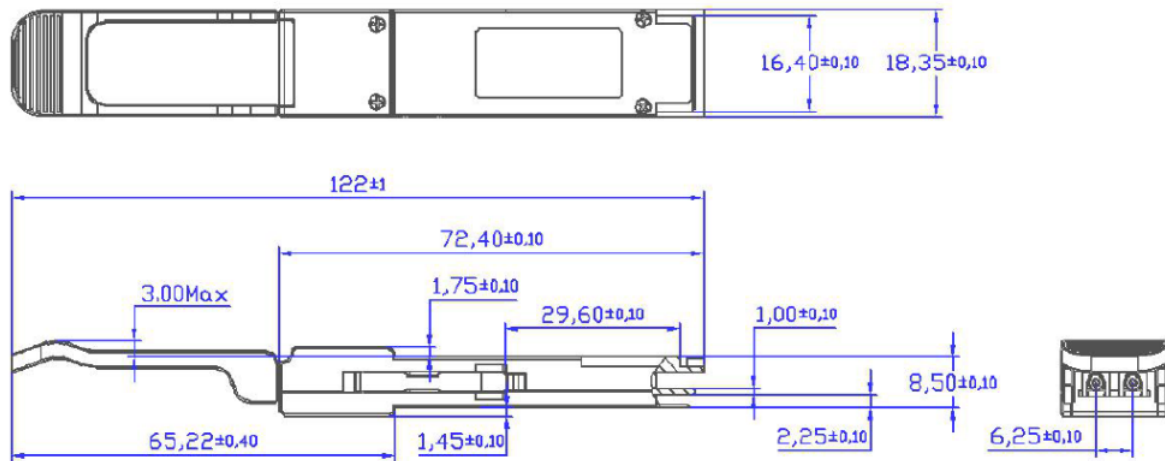

ORDERING INFORMATION

Jabil Part Number	Package	Rate	Reach	Other info
JPQ81CIRLCC000CL4	QSFP28	100G	2Km	DDM/RoHS

CONTACT INFORMATION

For additional information and evaluation samples order, please contact:

Chuck Sinha, Sr. Director of Sales
 Jabil Photonics
 5960 Inglewood Dr. Suite 100, Pleasanton, CA

Mobile: 408-505-0955 Email: Chuck_Sinha@Jabil.com